Nebraska Department of Water, Energy, and Environment

Processed: 10/22/2026 4:34:46 PM

REGISTERED GROUNDWATER WELLS DATA RETRIEVAL

Search Results Maximum 100 Per Page

Note:

Public Water Supply information is not available through this tool. If you have a need for such information, please submit a request through the following link:

Submit a DWEE Assistance Request Form (https://app.smartsheet.com/b/form/cfd8e319e8554b7191c6602a62611c19) . The well owner will be contacted for the purpose of authorizing access to information about their well(s). All registration documentation for water wells registered after January 1, 1969, except Public Water Supply wells, are now available.

Due to possibility of a well being in more than one series, an individual well might be listed more than once.

1 records found.

Registration# Well ID Permit Number	Use Status Other Use	County Name NRD Name Well Location Footage Latitude Longitude	Completion Date Filing Date Decommission Date Times Replaced Online Registration ID (NOLID) Well Driller License Number	Acres Irrigated Gallons/Minute Static Level Pumping Level Series # Heat System Loops	Pump Column Diameter Pump Depth Well Depth Reference Letter	Owner's Name Owner's ID Address
G-120973 148177 UE-03027	Irrigation Active Registered Well	Antelope Upper Elkhorn 27N 8W 32 SWNW 1320N 1300W	03/17/2003 04/15/2003 105035196424314 39070	134.8 1250 gpm 113 ft 132 ft Single Project —	8 in 160 ft 365 ft	Lois Bennett etal 130437 51156 859 Rd Ewing NE 68735

Showing 1 to 1 of 1 records

Processed by State of Nebraska Department of Water, Energy, and Environment Data(Bank) 10/22/2026 4:35:14 PM
Subsection: NWNW Section: 32 Township: 27 Range: 8W
Footage: 1319 feet from the North section line and 1299 feet from the West section line.
Latitude: 42° 16' 25.51" Longitude: -98° 16' 36.83"

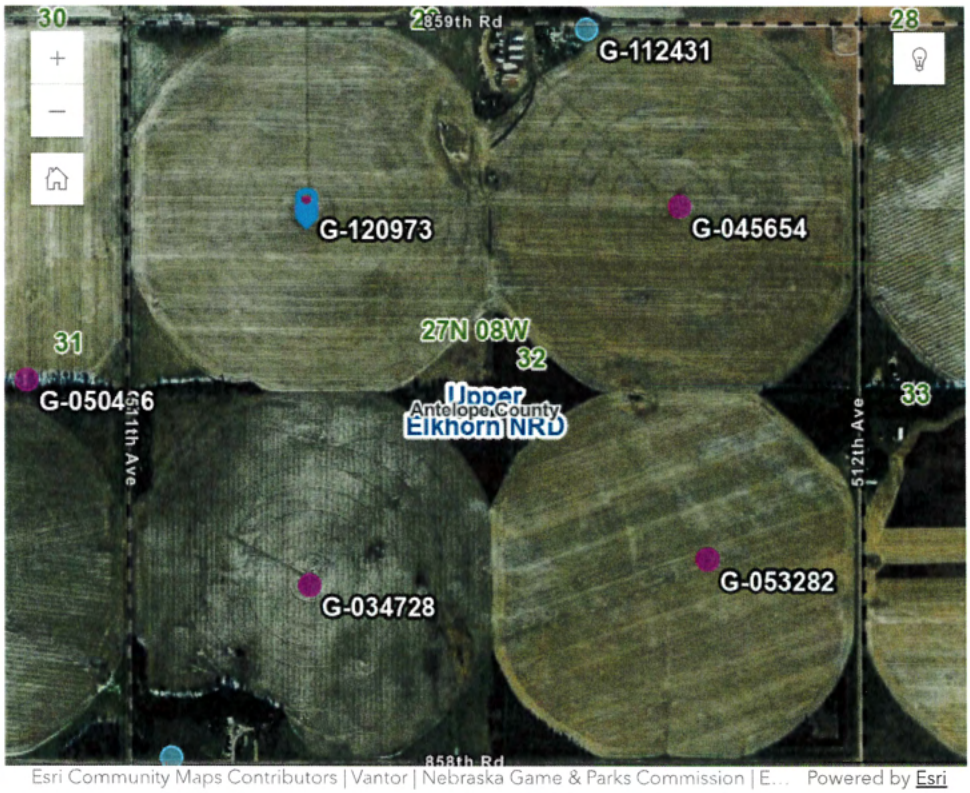

Legend (/dynamic/Images/MapGroundWaterLegend.png)
Zooming – 3 options

- Double click on Map to zoom in
- Plus(+) and minus(-) signs in upper left corner of map also zoom in and out. Hover with mouse over area and when pointer disappears, click. Plus is on top and minus is below it.
- Click on map and use mouse wheel to zoom in or out.

Panning – Moving around map

Click on map and hold, drag mouse direction to move map

Elton

GROSCH IRRIGATION CO., INC.

INDIVIDUAL JOB ORDER

Pump:	NEW		
Gearhead :	New		
Water level;	113'	Check ???	
Well depth;	365'		
Customer:			
Legal:	NW 32-27-8 Ant.co.		
Location:			

DATE 3/24/2003

P.O.# ON

DESIGN 1100@45#@97 hp

IMP SETTING; 1T2.5F

Pump Setting; 160'

Pump head:	New 8" FM 2 1/2" CT	new	Bowl Assembly:	4-12 KSH FS 8" t&c	
Top Tube :	2 1/2" x 61 1/4"	Build	Bowl Shaft:	1 1/2 12 x 1 11/16 x76.75 new	✓
Top Tube Brg	2 1/2" x 1 1/2" Large Nut	new	Impeller-Trim:		
S/N :	GI ON 303020	NEW	-Full:	4-8.58	
Check Valve:	8-MW Chem Ck fxf		Rubber-BRGS:	Standard	
Throddle Valve:	MW Throddle Valve FxF ????		S.S.-Bolts:	YES	
Column Pipe:	8-8 t&c green x 20'		Projection Column:	8"T&C standard	
			Projection OT:	ot 6" (w/4 1/2" adaptor)"	
Spiders:	5-8 x 2 1/2 BW		Projection:	shaft 17 1/2"	
Oil Tube:	8- 1 1/2 x 2 1 1/2 x 20' brass				
		new	Electric MT:	100 hp US(Ck screen)	
Bell Tube:			Serial Number:	F10-BF68-MC5	
Headshaft:	1 1/2 12 x 1 1/2 x 43" Build	✓	Pump Panel:		
Tail Pipe:	Drop Ck YES	SS Bolts	Fuse/Heater:		

JOB WORK REPORT

	Time & Date	Signature	Remarks:
Machine:			
Assembly:			
Installer:	Chuggy & Dustin 3/25/03		

Well 360

GROSCH IRRIGATION CO., INC.

Casing Type

16" SDR-26

Casing Log

16" Cap

240' - 16" Perf. .051
12-20 Jets

120' - 16" Plain
6-20 Jets

360

Base

Seal
8-10'

Date 2/6/03

Owner Lois Rennett

Contact

Address Orchard.

Legal NW-32-27-8 County Antelope

Location Orchard 2W 4S 1/4E SSOR

Orchard 4S 3/4W SSOR

1320 Feet From The ~~South~~ / North

1300 Feet From The ~~East~~ / West

Permit No. 03027 Pivot Dealer

Well Depth 365' Date Drilled 3-17-03

Perf 240' Plain 125'

Drilling Additives 5 Bags Gel-7

Seal(s) 10-8

Gravel 65 yds

Base 1

SWL 113' Feet

700	GPM	114	Feet
800	GPM	115	Feet
900	GPM	118	Feet
1000	GPM	122	Feet
1100	GPM	127	Feet
1250		132	feet

Water Sample ppm

Centralizers: 6

COMMENTS: Test Hole @ Pivot (Exist. neg)
Watch for Underground
& Wire ~~East~~ North
Well 20+ West of Pivot. - He'll ck Underground.
Water His Well East - 1200 GPM
Underground To West @ 60# 125hp

Test Driller Date

Well Driller

GROSCH IRRIGATION CO., INC.

Branch O'Neill
Date March 06, 2003

#1 - 03

Name

Address

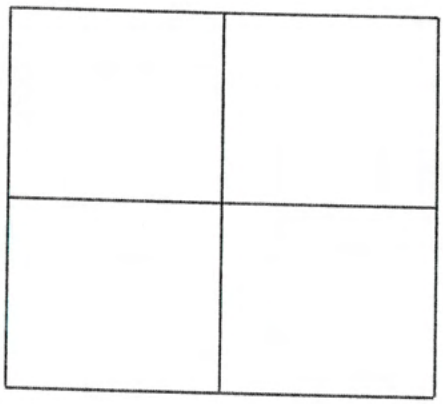

42d / 16 / 25
98d / 16 / 37

SW NW 1/4 32 SEC 27 TN 8 RA

Antelope Co.

(LOCATE TEST WITH X)

Upper Elkhorn NRD

1371 FEET FROM NORTH LINE
1286 FEET FROM WEST LINE

TEST LOG

FOOTAGE		DESCRIPTION
0	3	TOP SOIL
3	12	SAND
12	64	CLAY W/ LITTLE SAND
64	72	CLAY W/ SAND
72	80	CLAY W/ GRAVEL
80	144	FINE GRAVEL
144	151	FINE GRAVEL W/ COARSE SAND
151	173	MEDIUM GRAVEL
173	186	COARSE SAND
186	231	MEDIUM PEPPER SAND W/ SOME SANDSTONE
231	260	SANDSTONE / MEDIUM PEPPER SAND W/ THIN LIMESTONE LAYER
260	291	MEDIUM PEPPER SAND / SANDSTONE W/ FEW THIN CLAY LAYERS
291	324	SANDSTONE / FINE PEPPER SAND W/ THIN CLAY LAYER
324	361	FINE PEPPER SAND / CLAY LAYER
361	383	CLAY W/ THIN SANDSTONE LAYERS
383	400	CLAY

DRILLER
Randy Stahlecker